


**NEW
PRODUCT**

PoliCarb® 10mm 5w

Lightweight. Transparent.
THERMAL INSULATED.

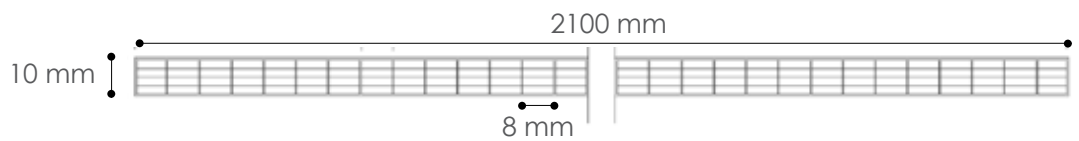

New performance for a **versatile & easy to install** product
UV-protected multiwall Polycarbonate sheets

Thickness (mm)	10
Structure (walls)	5
Width (mm)	2.100
Air channel Width (mm)	8
Minimum curvable radius (mm)	2.000

Thermal transmittance U (W/m²K)	2,4
Linear thermal expansion	0,065 mm/m°C
Temperature range	-40°C +120°C
UV protection	1 side coextrusion
Fire Reaction EN 13501-1	EuroClass B-s1, dO



**Curved / Flat Roofs
Ceilings
Shelters & Skylights
Shed Windows**



**Indoor/ Outdoor
translucent partitions
Verandas**

Natural Indoor lighting
Translucent surfaces

